



www.stutrailer.com

CONCRETE MIXER TRAILER

SEMI-TRAILERS CONCRETE MIXER


Lowbed · Low Loader · Flatbed · Tipper · Container · Car Transporter
STU Trailers® Company Ltd. · Karatay / Konya / Türkiye · Exporting to 60 countries

+90 541 336 63 77

sales@stutrailer.com

www.stutrailer.com

12,7M3 / 14,7M3 CONCRETE MIXER TRAILER

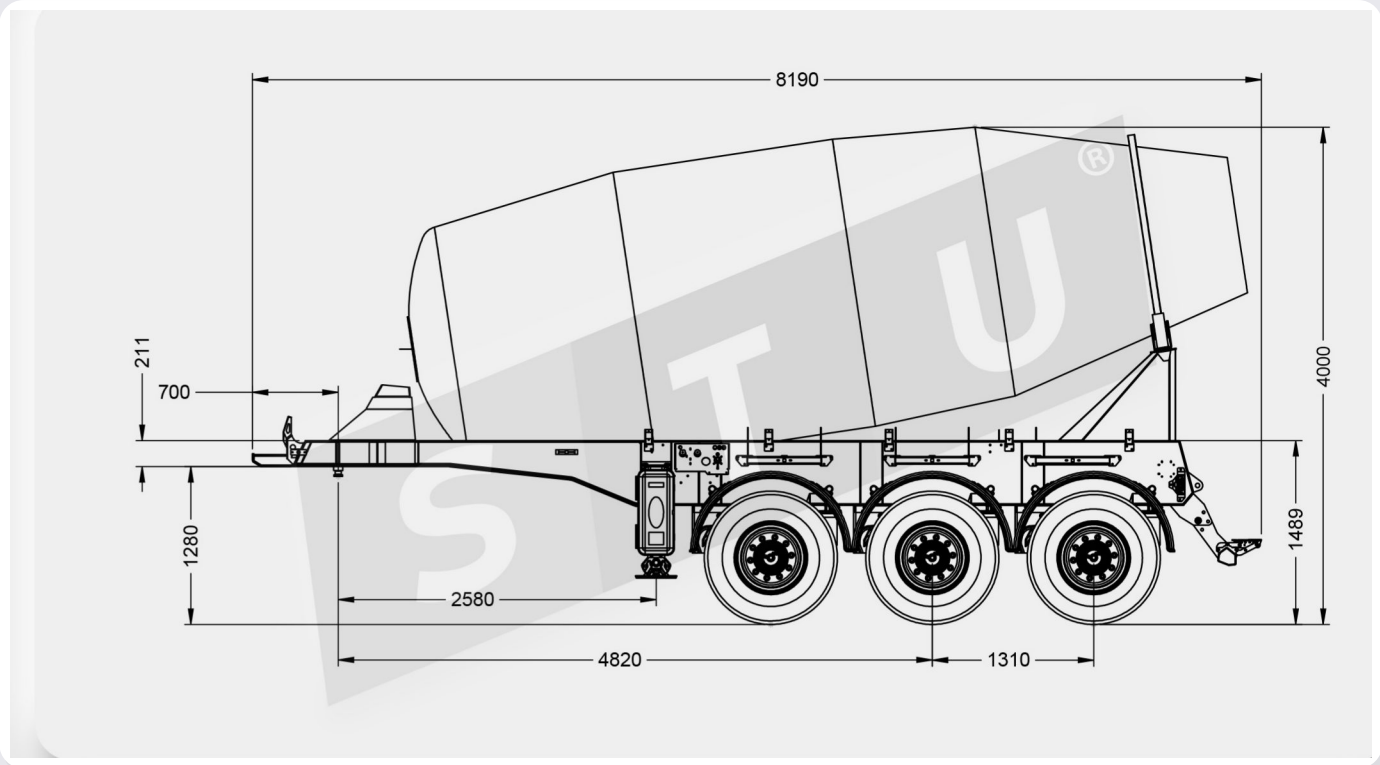

SPECIFICATIONS

CHASSIS : Strengthened "I" section centre members are welded by a submerged welding machine They are welded between 120/12 mm bottom or top flat steel and 5 mm hub plate Axles. : SAF Brand - 3x9 Tonnes axles with air suspensions / Disc brakes,
Suspensions : Air Suspension System with pillows (For EU Market)
Brake System : 2S-2M Wabco or Knorr Brake EBS system
Brake Chambers : 1 Axles with T 24/30 emergency brake chamber, 2 axles with 30/30 service brake chambers
Electrical system : LED Lights are available 2x7 pin sockets - 24V, lights accord to standard in SAE rear stop lamps, side marker lamps, brake safety warning lamps and signal light fitted at the rear, 2 tail & stop combined lamps (red) , 2 turn signal combined lamps (orange), 1 license lamp (white), 2 Hella Brand Night Working Lights
Tires : 6 Pieces 385/65 R22,5" Goodyear, Pirelli, Lassa, Starmaxx brands are available Rims : 6 Pieces 22,5" Jantas or Jantsa bran
King Pin : 2" king pin detachable from below made by SAE standards E certificate
Accessories : 6 x Short mudguards 1 x Plastic tool box with standard wheel tools (at the left side) 1 x Closed type metal box for one unit spare tire carrier 2 x 3M reflector side and rear 6 Cylinder Deutz Brand Engine

DRUM TECHNICAL DETAILS

Nominal capacity : 12,7 m³ / 14,7 m³
Drum &Blades : Drum walls made in 30MnB5 anti---wear resistant steel --- (4mm thickness) Mixing blades made in 30MnB5 anti---wear resistant steel --- (4mm thickness)
Drum Turning Controls : Controls at back side with manual or electrical control box or Hydrostatic transmission
Hydraulic Pump : (110 cm3/rev) variable displacement hydraulic pump with 25 cm3/rev
Hydraulic Motor : (110 cm3/rev) fixed displacement hydraulic motor Reductor > 2.91 ae m) double stage planetary gearbox REDUCTOR
Oil Cooler : AKG Brand with 12 lt oil tank, thermostat control and absorption filter
Water system : 650 lt steel pressurized water tank (Galvanization is optional)
Standard Features : 180° swivelling discharging chute with support and hydraulic jack for lifting 2 Polystone lightweight extension chutes with holders Anti-wear resistant plate on discharging hopper 2 X Inspection manhole and Inspection ladder | Right and Left sides have water valve, There will be rubber on the cone 60 Lt Additive tank
Painting
First Step : Sand Blasting all surface,
First Layer : Barrier™ 80 Jotun (%80 Zinc-Reach) Coating Double Times - C5 (ISO 12944-2)
Second Layer : Jotun™ Epoxy Coating oe
Third Layer : Jotun™ Brand Premium Acrylic Paint
Fourth Layer : 2K Super Clear Coating for Protection and Shine (95-110 GU) Color of the trailer will be RAL Depend on Customer Choice)

DETAIL PICTURES

